

SP-LM Series

Single Point, Stainless Steel Heavy Capacity Load Cells

SPECIFICATIONS

Overload	Safe: 150% Ultimate: 300%
Output mV/V	2 ± 10%
Resistance	Input: 369 - 408 ohms Output: 350 ± 5 ohms
Zero Balance	± 1% of rated output
Excitation / AC-DC	15 VDC maximum
Non-linearity	\pm 0.03% of rated output
Hysteresis	\pm 0.03% of rated output
Non-repeatability	± 0.02% of rated output
Creep	\pm 0.03% of load in 20 min.
Deflection	.012-inch to .020-inch
sulation Resistance	5,000 megohms
Protection Class	IP-65
Accuracy Class	C3
Temperature Range	Compensated: 14°F to 104°F Operating: -20°F to +200°F
Temperature Effect	Rated Output: ± 0.0008%/ F of load Zero Balance: ± 0.0015%/ F of rated output

Ins

Ultimate: 300%
2 ± 10%
nput: 369 - 408 ohms Dutput: 350 ± 5 ohms
± 1% of rated output
15 VDC maximum
± 0.03% of rated output
± 0.03% of rated output
± 0.02% of rated output
± 0.03% of load in 20 min.
012-inch to .020-inch
5,000 megohms
P-65
C3
Compensated: 14°F to 104°F Operating: -20°F to +200°F
Rated Output: ± 0.0008%/ F of load Zero Balance:

MADE IN USA



- 200 lb to 1,000 lb capacities
- Highly resistant to eccentric loads
- Stainless steel construction for the ultimate durability
- Direct mounting to weighing platform
- 7-ft/2.1-m integral shielded cable
- VCAP certified

Cardinal Scale's SP-LM series single point load cells are manufactured for heavier capacity weighing. These cells are fabricated from stainless steel and are available in capacities from 200 lb to 1,000 lb.


The unique design of Cardinal's single point load cells offers cost-saving advantages for many weighing applications. The load cell can be mounted directly to the weighing platform, thereby eliminating flexures, pivots, bearings and mechanical levers. All load cells feature threaded mounting holes, proprietary sealant, and a 7-ft / 2.1-m integral multiconductor cable secured by a strain relief seal.


Bulletin No. 263-18B

Single Point SP-LM Series

Heavier-Capacity, Stainless Steel Load Cells




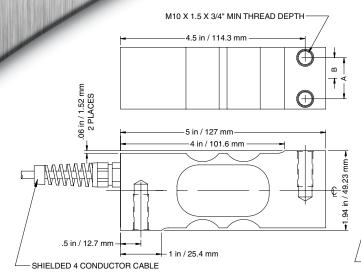

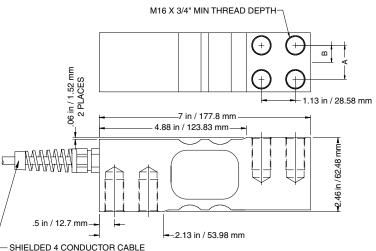

MODEL	CAPACITY	" A "	"B"
SP-200LM	200 lb / 90 kg	1 in / 25.4 mm	0.5 in / 12.7 mm

MODEL	CAPACITY	"A"	"В"
SP-500LM	500 lb / 225 kg	1.125 in / 28.6 mm	0.562 in / 14.3 mm
SP-1000LM	1,000 lb / 455 kg	1.125 in / 28.6 mm	0.562 in / 14.3 mm

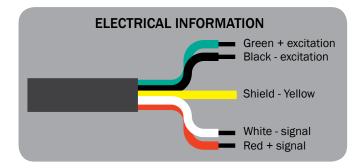

State-of-the-Art Load Cell Manufacturing Facility



VCAP CERTIFIED

Cardinal Scale has been formally audited and found to be fully compliant with the Verified Conformity Assessment Program (VCAP) administered by the National Type Evaluation Program (NTEP) of the National Conference on Weights and Measures (NCWM).

Cardinal Scale reserves the right to improve, enhance or modify features and specifications without prior notice. All registered trademarks are the property of their respective owners.



www.CardinalScale.com

SOLD BY:

ControlSystemsUSA.com Houston, Texas USA sales@ControlSystemsUSA.com 832-615-3588



