

BLINKING LED PANEL MOUNT INDICATOR WITH BUZZER P 22 DBF



Indicator lamp/buzzer combination for 22.5 mounting hole.

- Guaranteed high protection class to the housing.
- Superior shape, hence high signaling effect on all sides.
- Space-saving combination of buzzer and blinking LED indicator for increasing the effect of the signal.
- Easy to mount label holders available as an accessory.
- Simple electrical connection by means of screw terminals.

IP 40


protection system


+50 °C
-25 °C

operating temperature

PRODUCT	P 22 DBF			
DATA				
Rated voltage	230 V AC	115 V AC	48 V AC/DC	24 V AC/DC
Nominal current consumption	max. 30 mA			
Operating mode	1 Hz blinking light with buzzer (pulsating tone)			
Sound pressure level	80 dB(A) @ 10 cm			
Sound pressure level @DIN-tone	---			
Light source	LED array			
Service life of light source	>50,000 h			
Lens colour	red			
Operating temperature	-25 °C ... +50 °C			
Relative humidity	90 % @ +20 °C			
Protection system (EN 60529)	IP 40 (to housing)			
Mounting	panel-mounting: Ø 22.5 mm			
Type of connection	screw terminals 1.5 mm ²			
Weight	90 g			

DIMENSIONS PANEL CUT-OUT

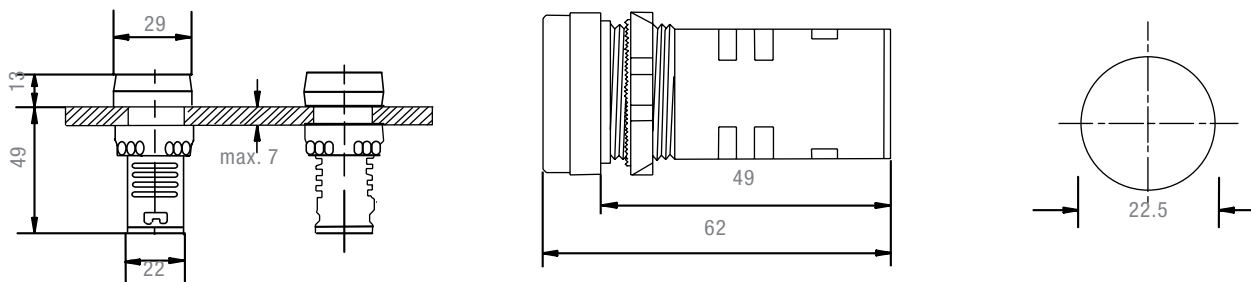

ARTICLE NO.	P 22 DBF			
Lens colour	230 V AC	115 V AC	48 V AC/DC	24 V AC/DC
	23272105000	23272155000	23272705000	23272805000

OPTIONS/ACCESSORIES

Label holder 25 x 10 mm

Article no.
23292000000

Label holder 25 x 18 mm

Article no.
23291000000